



# Teardrop Flag Assembly Guide


IMPORTANT: Product Fragile - Handle with Care

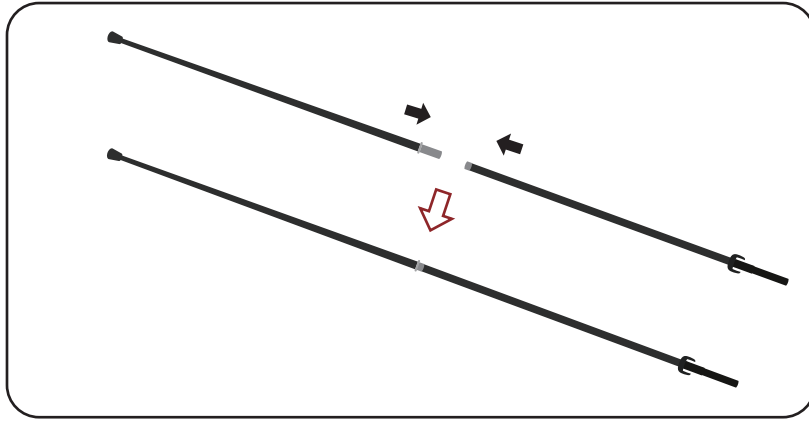


1. Assemble the first 2 tapered fiberglass rods, starting with the thinnest rod and then adding the next size, making sure they fit snugly together.

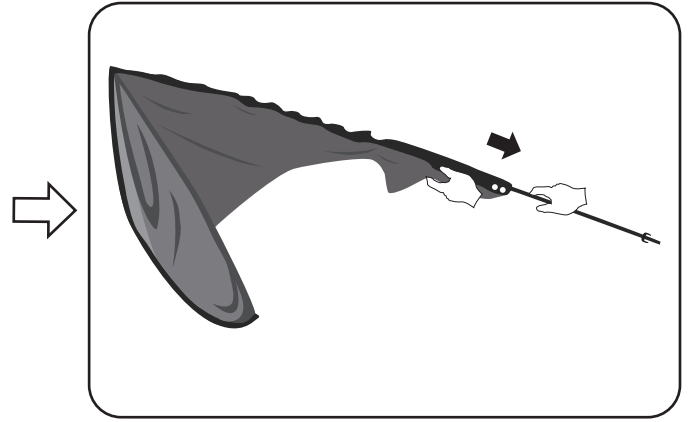

2. Insert these 2 rods into the sleeve on the side of the banner.  
\* It is important to ensure the rods are positioned right to the end of the sleeve.

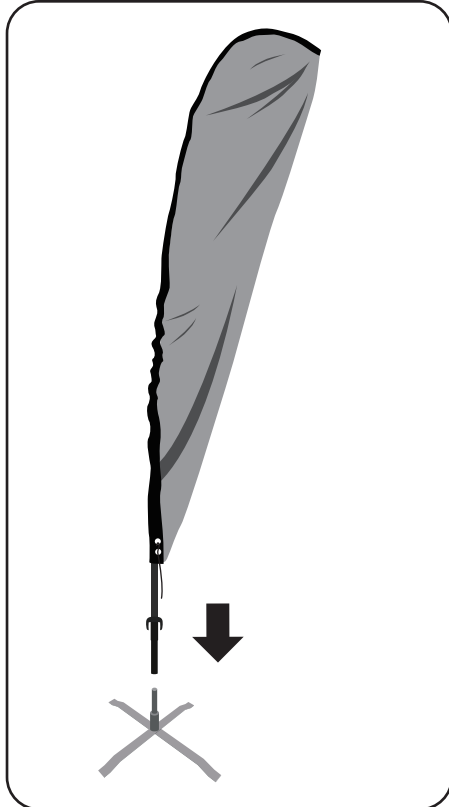


3. Insert these 2 rods into the base.

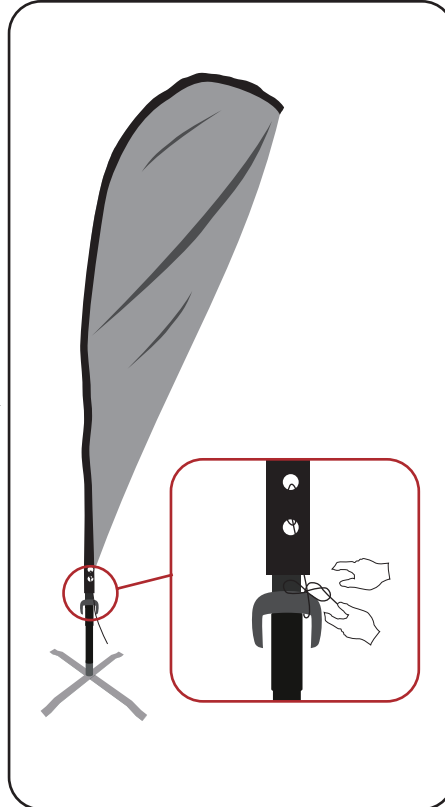

3. Tie the rope to clip on bottom rod.


\* If the banner is too loose or too tight, adjust elastic rope.

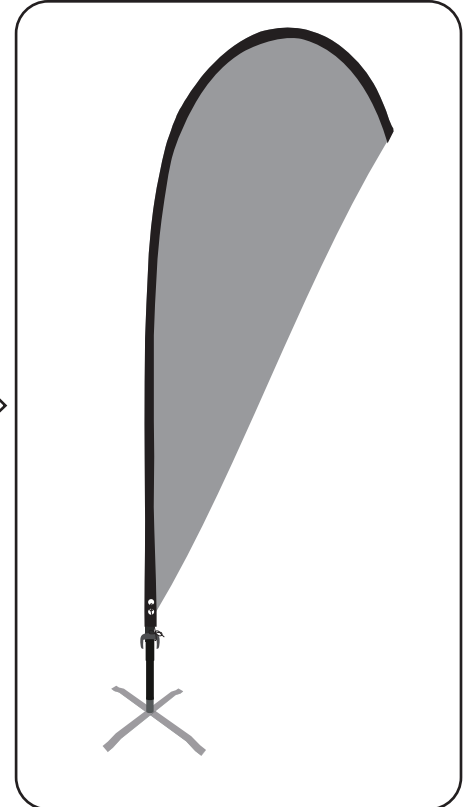


4. Complete.

# Teardrop Flag Disassembly Guide


IMPORTANT: Product Fragile - Handle with Care

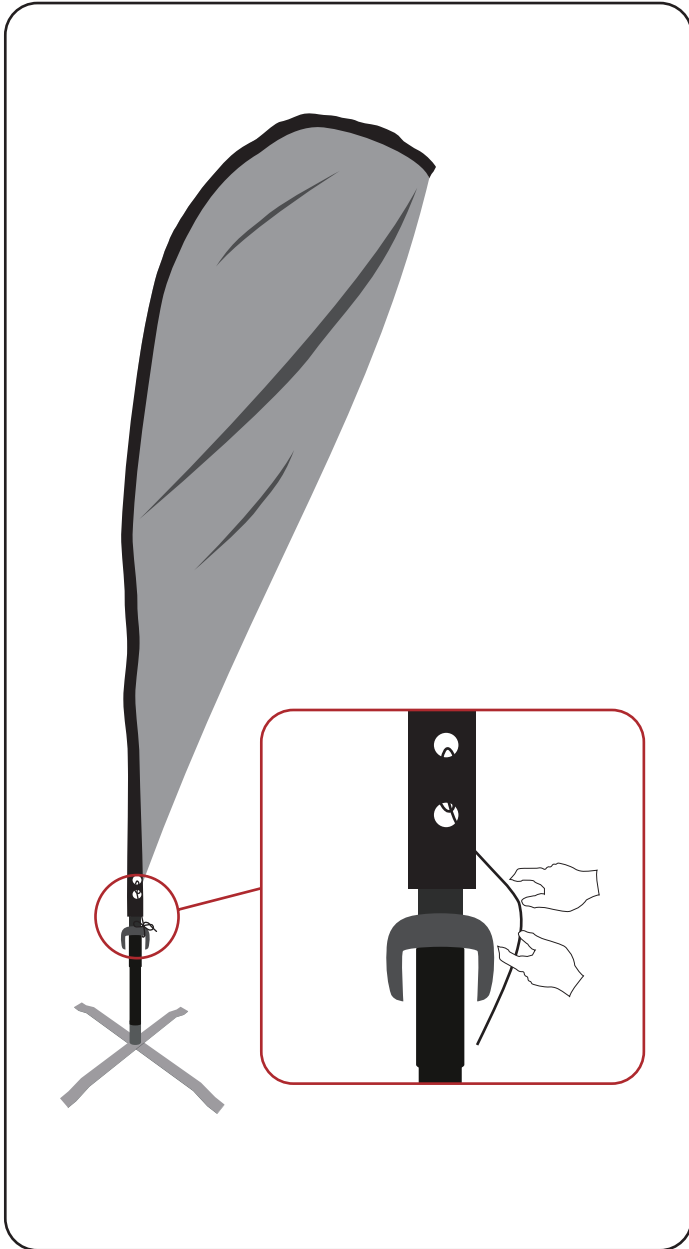


1. Untie the rope to clip on bottom rod.

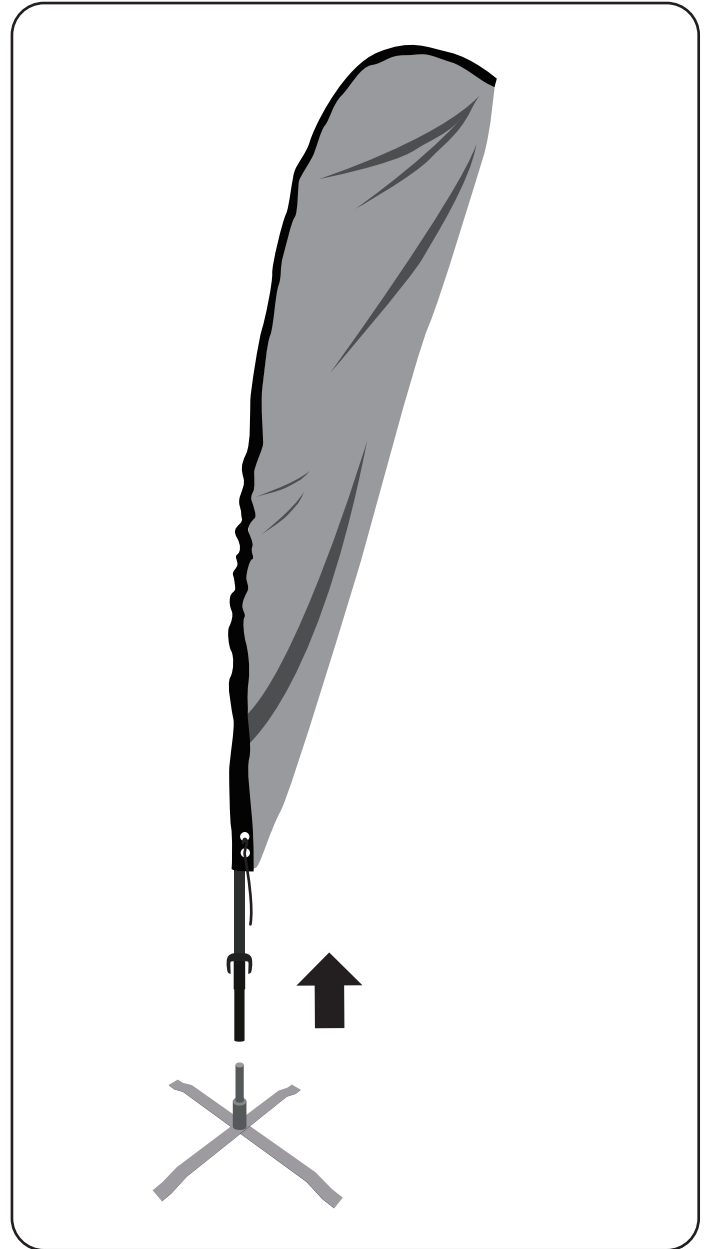

2. Take out base.

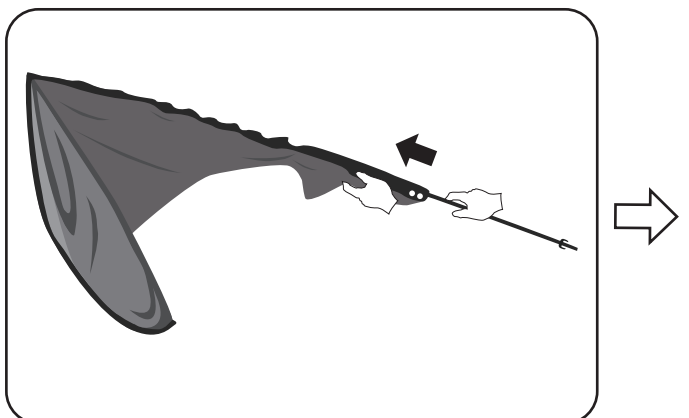

3. Move these 2 rods out the sleeve on the side of the banner.

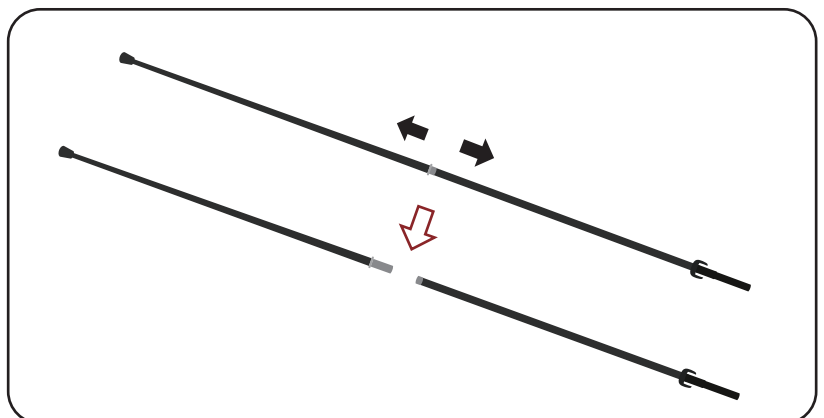

4. Disassemble the 2 tapered fiberglass rods.